



# Vertical Single Skin Flat Bottomed Cylindrical Storage Tanks



- Manufactured in accordance with BS 799: Part 5: **Type G** or BS EN 14015
- All welded seams
- Certified tested
- Fitted with 600mm dia. Manhole with set pinned cover and gasket
- Standard connections include two 65mm, one 40mm and one 25mm screwed sockets
- Finished one coat of primer/gloss finish, or to customer's requirements
- Steel plate to BS EN 10 025: 2004: S275.

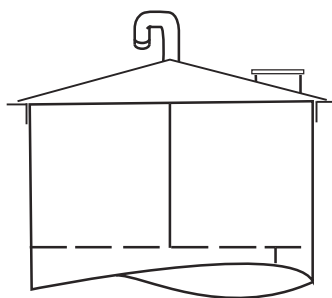

Conical Top  
BS EN 14015

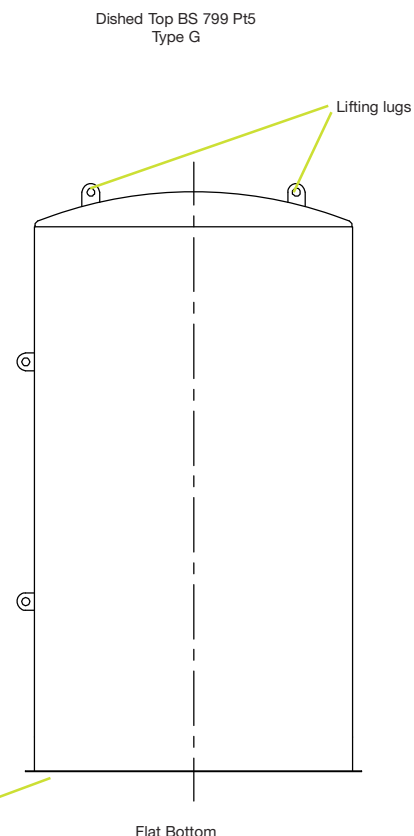

Dished Top BS 799 Pt5  
Type G

Lifting lugs

High load DPC  
membrane  
recommended  
between tank base &  
concrete foundation

Flat Bottom

## Type G

Ref	Capacity Litres	Height metres	Internal Dia metres	Shell Thk mm	Base Thk mm	Weight (Approx)Kg
V01	2273	1.528	1.494	6	6	460
V02	2841	1.867	1.494	6	6	530
V03	3409	2.207	1.494	6	6	630
V04	4546	2.889	1.494	6	6	790
V05	5682	3.569	1.494	6	6	960
V08	9092	3.547	1.900	6	6	1230
V10	11365	4.389	1.900	6	6	1480
V13	13638	5.230	1.900	6	6	1750
V15	18184	4.320	2.486	6	8	1970
V17	22730	5.303	2.486	6	8	2370
V20	27275	6.286	2.486	6	8	2780
V21	31821	7.270	2.486	6	8	2860
V22	36367	8.253	2.486	6	8	3350
V23	40913	6.600	2.986	6	10	3690
V24	45459	7.281	2.986	6	10	3950
V25	54551	8.390	2.986	6	10	4720
V26	68189	10.262	2.986	6	10	5430
V27	90918	13.654	2.986	6	10	6850
V28	100010	14.935	2.986	6	10	7044
V29	113647	16.926	2.986	6	10	7924
V30	136377	11.735	4.000	8	10	11500