

Gravity Feed Envirotank Rectangular Enclosed Bunded Storage Tanks

The most cost effective and environmentally safe way of storing and dispensing gas, oil, diesel and kerosene. Ideal for fuelling plant at building sites and smaller transport operations.

The **Gravity Envirotank** can also be coupled into small standby generator and boiler installations.


The Envirotanks compact design allows it to take up the minimum of space. Being a totally self contained, ready-to-use sealed unit, makes it easily movable when empty and gives low maintenance as no rainwater can enter the bunded area.

The bund is designed to contain 110% of the primary tank volume. Manufactured generally to BS 799 Part 5 Type J 2010. From Steel plate to BS EN 10 025: 2004: S275

Compliance with the control of pollution regulations.



A built in end security cabinet. A standard feature.

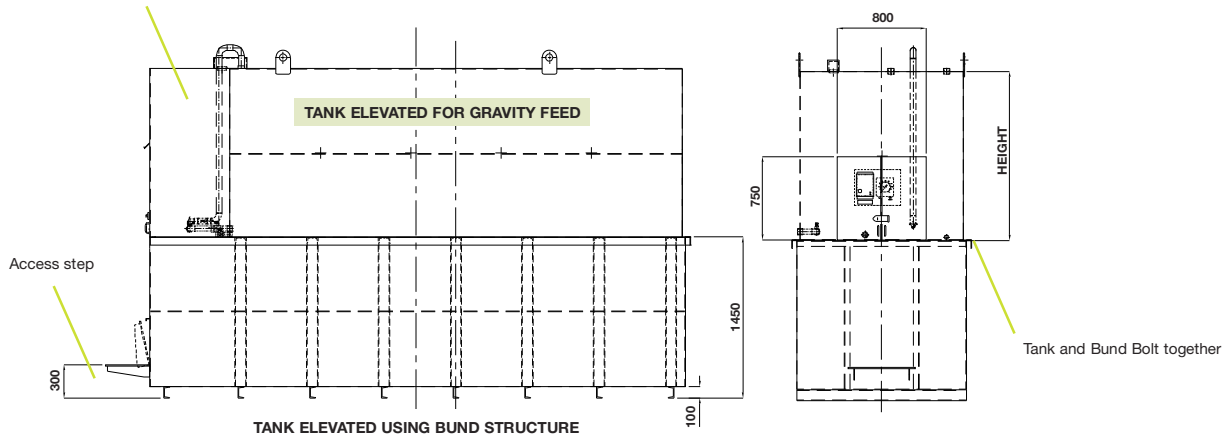

Ref	Capacity Litres	Length mm	Width mm	Height mm	Weight (Approx)Kg	Thickness mm
D01	1364	1750	1170	1220	814	3
D02	2273	2350	1170	1220	986	3
D03	2727	2670	1170	1220	1024	3
D04	3636	3300	1170	1220	1323	3
D05	4546	3950	1170	1220	1515	3
D06	5682	4750	1170	1220	1740	3
D07	6819	3850	1474	1500	1846	3
D08	9091	4865	1474	1500	2273	3

Options

Ball valve, hose and nozzle can be supplied if a flow meter is not required.

Notes

Outer skin designed to contain 110% of inner tank volume.

Finish

One coat of zinc phosphate primer, one coat of green oil resistant paint.