


# Horizontal Single Skin Storage Tanks

## Above or Below Ground



- Single, double or multi-compartment tanks
- BS 799: Part 5: **Type A or Type B** also BS EN 12285-2
- Dished and flanged ends, all welded seams
- Certified tested
- Fitted with 600mm dia. manhole with set pinned cover and gasket
- Manufactured from steel plate to BS EN 10 025: 2004: S275.

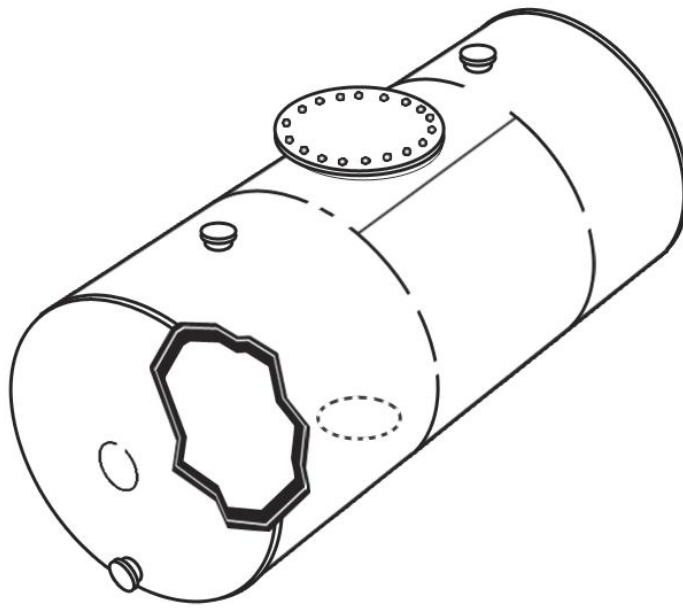

## Cylindrical

Ref	Capacity Litres	Overall Length metres	Internal Diameter metres	Plate Thickness & weight (Approx)Kg		
				5mm	6mm	7mm
H01	2273	1.753	1.494	400	457	
H02	2841	2.057	1.494	440	521	
H03	3409	2.438	1.494	520	622	
H04	4546	3.277	1.494	653	787	
H05	5682	3.353	1.494		953	
H08	9091	3.547	1.900		1229	
H10	11364	4.389	1.900		1470	
H13	13637	5.230	1.900		1749	
H17	18184	4.320	2.486		1965	
H19	22729	5.303	2.486		2368	
H22	27275	6.286	2.486		2776	3710
H23	31367	5.791	2.743		2851	3801
H24	36367	6.477	2.743		3343	4457
H25	40913	7.315	2.743		3686	4915
H26	45459	8.052	2.743		3940	5253
H27	54551	9.754	2.743		4711	6124
H36	68189	12.168	2.743		5419	7225
H28	68189	10.262	2.986		5419	7225
H30	90918	13.564	2.986		6838	9117
H31	100010	14.935	2.986		7034	9365
H32	113647	16.912	2.986		7914	10550
H37	115000	17.150	2.986		8026	10698
H33	136377	11.735	4.000		8590	11110